




AS9238 SERIES

External Dimensions

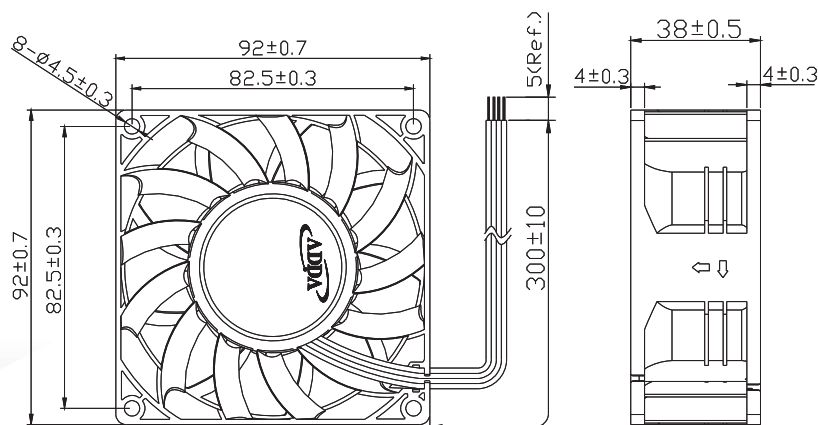

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1430AWG24


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
92x92x38	AS09212LB389BB0	◎	12	0.98	12.00	5000	2.999	106.000	0.643	16.332	55.0	255.0
	AS09212MB389BB0	◎	12	1.55	19.00	6000	3.594	127.000	0.926	23.520	61.0	
	AS09212HB389BB0	◎	12	2.24	27.00	7000	4.273	151.000	1.308	33.223	64.0	
	AS09212UB389BB0	◎	12	3.50	42.00	8000	4.924	174.000	1.708	43.383	68.0	
	AS09224LB389BB0	◎	24	0.55	13.00	5000	2.999	106.000	0.643	16.332	55.0	
	AS09224MB389BB0	◎	24	0.80	19.00	6000	3.594	127.000	0.926	23.520	61.0	
	AS09224HB389BB0	◎	24	1.15	28.00	7000	4.273	151.000	1.308	33.223	64.0	
	AS09224UB389BB0	◎	24	1.80	43.00	8000	4.924	174.000	1.708	43.383	68.0	
	AS09248LB389BB0	◎	48	0.30	14.00	5000	2.999	106.000	0.643	16.332	55.0	
	AS09248MB389BB0	◎	48	0.45	22.00	6000	3.594	127.000	0.926	23.520	61.0	
	AS09248HB389BB0	◎	48	0.60	29.00	7000	4.273	151.000	1.308	33.223	64.0	
	AS09248UB389BB0	◎	48	0.90	43.00	8000	4.924	174.000	1.708	43.383	68.0	

Specifications subject to change without notice.

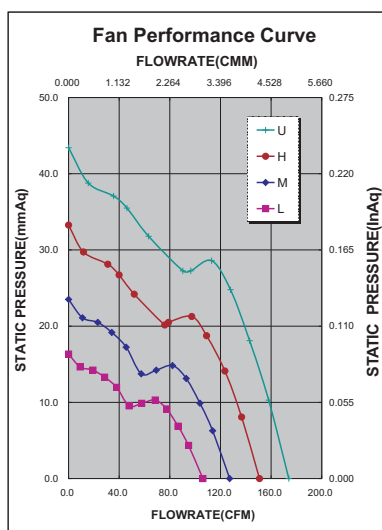

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							✓

*Safety approvals

UL	UL	SP	CE	CE
✓	✓		✓	✓